Tuesday, 10/24/2006 12:59:09 PM Kim Johnston User: **Process Sheet** : SIGN ASSEMBLY : CU-DAR001 Dart Helicopters Services **Drawing Name** Customer Job Number : 29151 : 10087 **Estimate Number** : NIA : D31183 Part Number P.O. Number NIA . D3118 REVC S.O. No. : **Drawing Number** : 10/24/2006 This Issue Project Number : N/A Prsht Rev. : PURCHASED PARTS : C Type **Drawing Revision** First Issue : 24676 Material **Previous Run** : 10/31/2006 10 Um: Each Qty: **Due Date** Written By Checked & Approved By : Est. A: 02.05.15 New Issue Comment **Additional Product** Job Number: Description: Seq. #: Machine Or Operation: **PURCHASING** PG 1.0 Comment: PURCHASING CLOCE110125 Issue P/O: 2335 Seal as per dwg D3118 Possible Supplier: Self powered lighting inc.Replaces: BHT P/N 212-072-637-107 Material release note required Sign should be self luminus to min. brightness of 160 microlamberts 212072637107 Sign Assembly 2.0 1.0000 Each(s)/Unit Total: 10.0000 Each(s) Comment: Qty.: Sign Assemly PACKAGING RESOURCE #1 3.0 PACKAGING 1 Comment: PACKAGING RESOURCE #1 Receive & Inspect for Transit Damage Ensure Material Release Note is attached 4.0 QC6 Comment: DIMENSIONAL CHECK Check dims to dwg and certification attached PACKAGING RESOURCE #1 5.0 76.11.16 Comment: PACKAGING RESOURCE #1 Identify and Stock Location:

Dart Ae	rospace L	td							
W/O:			W	ORK ORDER CHANG	GES				
DATE	STEP	PRO	OCEDURE CH	ANGE	Ву	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector
									
Part No	:	PAR #:	Fault Cat	egory:	NCR: Yes	NO DQ	A : 🙀	ß_ Date: ₫	6/11/16
					QA:	N/C Close	d:	_ Date: _	
NCR:		,	WORK ORE	ER NON-CONFORM	ANCE (NC	R)			
		Description of NC		Corrective Action Sec	ction B	Verifi	cation	Approval	Approval
DATE	STEP	Section A	Initial Chief Eng	Action Description Chief Eng	Sign Date	& Sect	ion C	Chief Eng	QC Inspector
							,		

NOTE: Date & initial all entries

Date:

Tuesday, 10/24/2006 12:59:09 PM

Uger:

Kim Johnston

Process Sheet

Customer: CU-DAR001 Dart Helicopters Services

Drawing Name: SIGN ASSEMBLY

Job Number: 29151

Part Number: D31183

Job Number:



Seq. #:

Machine Or Operation:

Description:

6.0

QC21



FINAL INSPECTION/W/O RELEASE



Comment: FINAL INSPECTION/W/O RELEASE

Job Completion




a de lile

рап Ае	rospace	Lta							
W/O:			WC	RK ORDER CHANGE	S				
DATE	STEP	PRO	OCEDURE CHA	NGE	Ву	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC inspector
Part No	•	PAR #:	Fault Cate	gory:					
					QA: N	/C Close	d:	_ Date: _	
NCR:			WORK ORDI	ER NON-CONFORMAN	CE (NCR)			
DATE	STEP	Description of NC Section A	Initial Chief Eng	Corrective Action Section Action Description Chief Eng	Sign & Date		cation ion C	Approval Chief Eng	Approval QC Inspector

NOTE: Date & initial all entries




DESIG	A	DRAWN BY	DART AEROSPACE HAWKESBURY, ONTARIO, CANAD	
CHEC	KED	APPROVED	DRAWING NO.	REV. C
	#	4	D3118	SHEET 1 OF 2
DATE			TITLE	SCALE
05.0	2.22		SIGN ASSEMBLY	1:1
Α		02.04.15	NEW ISSUE	
В		04.05.05	ADD MINIMUM BRIGHTNESS = 160 MICROLAMBERTS	
С		05.02.22	ADD D3118-5	

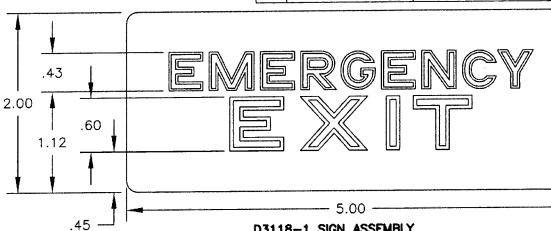

D3118-1 SIGN ASSEMBLY

REPLACES PREMIER P/N 027-57000-01, BHT P/N 46660-01008-00

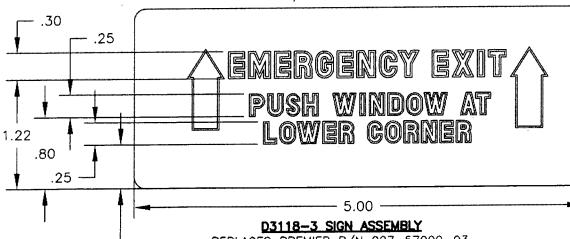

REPLACES PREMIER P/N 027-57000-03,

.49 -BHT P/N 212-072-637-107

NOTES 1) SIGNS SHOULD BE A RED BACKGROUND CLEAR LETTERING WITH WHITE BORDER AROUND

2) SIGN SHOULD BE SELF-LUMINUS TO MINIMUM BRIGHTNESS OF 160 MICROLAMBERTS

3) POSSIBLE SUPPLIER: SELF POWERED LIGHTING INC

8 WESTCHESTER PLAZA

ELMSFORD, NY 10523 PHONE: (914) 592-8230

FAX: (914) 592-8435

4) TOLERANCES ARE PER DART QSI 018 UNLESS OTHERWISE NOTED

5) ALL DIMENSIONS ARE IN INCHES

SHOP COPY EACH_{RI}UETTER ENGINEERING

.39

.39

2.00


UNCONTROLLED COPY SUBJECT TO AMENDMENT WITHOUT NOTICE

Copyright @ 2002 by DART AEROSPACE LTD

THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.



DESIGN	DRAWN BY	DART AEROS HAWKESBURY, ONTA	
CHECKED,	APPROVEDA	DRAWING NO.	REV. C
1 91	1 CH	D3118	SHEET 2 OF 2
DATE	······································	TITLE	SCALE
05.02.22		SIGN ASSEMBLY	NTS

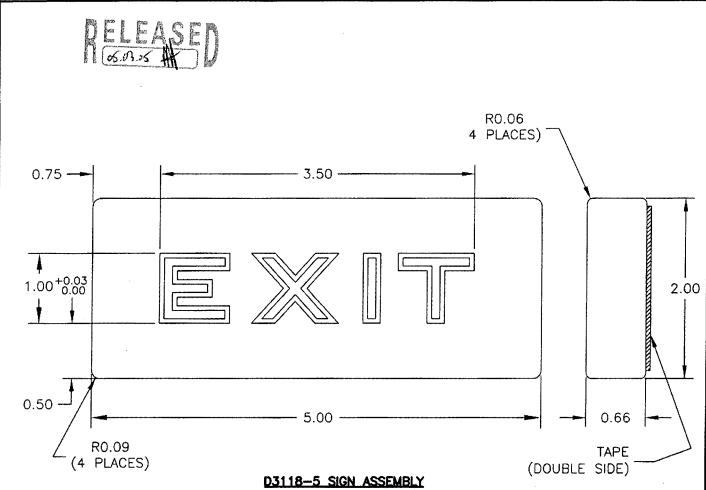

NOTES

- 1) SIGNS SHOULD BE A RED BACKGROUND CLEAR LETTERING WITH WHITE BORDER AROUND EACH LETTER
- 2) SIGN SHOULD BE SELF-LUMINUS TO MINIMUM BRIGHTNESS OF 160 MICROLAMBERTS
- 3) POSSIBLE SUPPLIER: T-LIGHT SIGN, P/N AC/4-A

SELF POWERED LIGHTING INC

8 WESTCHESTER PLAZA

ELMSFORD, NY 10523

PHONE: (914) 592-8230

FAX: (914) 592-8435

4) TOLERANCES ARE PER DART QSI 018 UNLESS OTHERWISE NOTED

5) ALL DIMENSIONS ARE IN INCHES

SHOP COPY RETURN TO ENGINEERING UNCONTROLLED COPY SUBJECT TO AMENDMENT

Copyright © 2002 by DART AEROSPACE LTD

THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.



31 WATERLOO AVE., PO BOX 657 BERWYN, PA 19312

CERTIFICATE OF CONFORMANCE

Customer PART ALPOSPACE	MFG: SAFETY LIGHT CORP
	SPL Order # : 54/41-9549
PNR ACHIZZ - 2/2072637107	S/N SP/7226-SP17235
Qty. Shipped: 10	

The undersigned certifies that all articles included in each shipment under the above Purchase Order are in accordance with the said Purchase Order and with all requirements, execifications and drawings pertinent to (including without limitations, all requirements, specifications and drawings as to process, finish and techniques) listed or referenced in said Order, and that materials used conform to the requirements of 14 CFR 25.853(a) (1) (iv), burn test criteria. All articles comply with FAA regulations and N.I.S.T. Standards per MIL-STD-45662 Paragraph 5.2.

- In addition, the above referenced Part Number complies with the FAA regulations 14 CFR 25.811 (b) (2) with a minimal brightness of 160 micro lamberts.
 - In addition, the above referenced Part Number conforms to the Drawing.

☐ In addition, the above referenced Part Number complies with the FAA regulations 14 CFR 25.812 (b) (1) with a minimal brightness of 400 micro lamberts

Inspected By:

Q.C. Personnel

(Seal)

Date: _//-/5